


SPECIFICATIONS				
CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK			
MOLDED MATERIAL/COLOR	PVC/BLACK			
CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	25 A			
RATED VOLTAGE [V]	600 V			
CABLE JACKET MATERIAL/COLOR	TPE/BLACK			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBERS OF CONDUCTORS [AWG]	4x10 AWG			
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K			

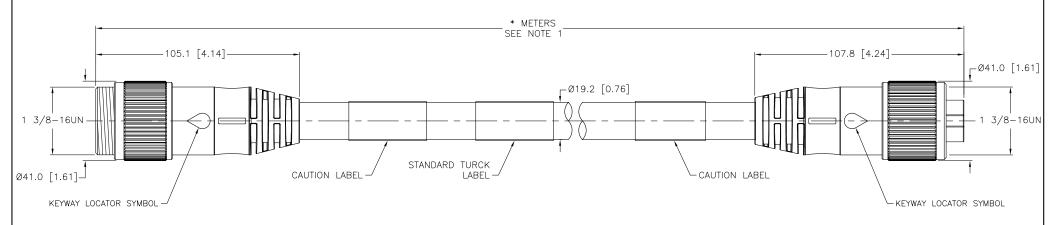

10/19/11

DATE

CABLE LENGTH	TOLERANCE				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				

## SOURCE DRAWING - FOR REFERENCE ONLY

1. "\*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

NOTES:

REV DESCRIPTION

UPDATE CABLE JACKET MATERIAL



FIC	RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK Inc. High Technology Sensors and Automation Control		3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 turck.com	N 55441 7769 '300 )708 fax
	MATERIAL		DRFT RDS	DATE 08/05/08	DESCRIPTION GSDM GKDM	4○ *M	
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=2.0	GSDIVI GNDIVI	40- N	
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT			
	FINISH	KEI EKENGE ONEI			IDENTIFICATION NO.		REV
36867	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [ INCH ]			В
ECO NO.	NO.		DO NOT SCALE	THIS DRAWING	FILE: 777022527	SHEET	1 OF 1